


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
None	First issue.	16 NOV 2010	JY
A	Changed connector from 15 to 9 pin.	15 DEC 2010	JY

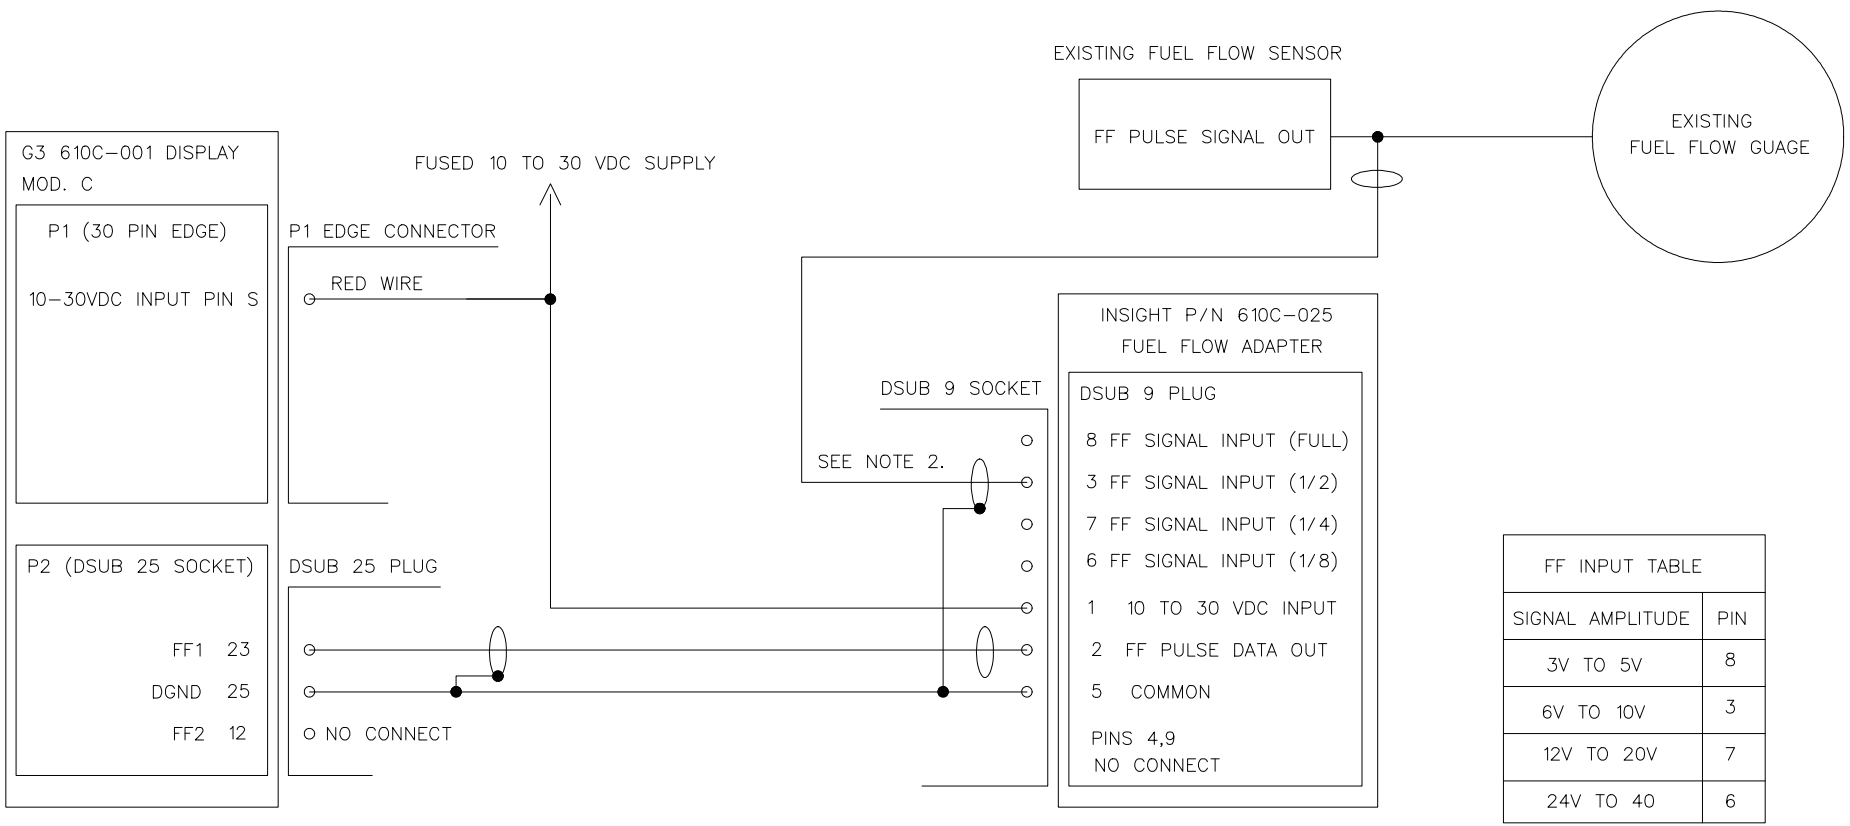

FF INPUT TABLE	
SIGNAL AMPLITUDE	PIN
3V TO 5V	8
6V TO 10V	3
12V TO 20V	7
24V TO 40	6

NOTES:

1. Use 24 AWG copper wire with TEFZEL or equivalent insulation unless otherwise specified.
2. Connect FF signal to one input pin, see input table.
3. Do not mount adapter in engine compartment.

	FUEL FLOW ADAPTER WIRING DIAGRAM						
	Insight Avionics Inc. Box 122, Fort Erie, Ontario L2A 5M6						
This drawing is the property of Insight Instrument Corporation and contains confidential and proprietary information. Reproduction or unauthorized use is strictly forbidden. © Copyright 2010	SIZE	FILE NAME: ffadaptA	DRAWING NO. 101116	DRN JY	CKD JY	QCD JY	REV A
	SCALE NONE	DATE 15 DEC 2010	SHEET 1 OF 1				